

**Conductive Tube Holder  
ER-ATH**

MJE-ERATH No.0031-22V

Thank you very much for using Panasonic products. Please read this Instruction Manual carefully and thoroughly for the correct and optimum use of this product. Kindly keep this manual in a convenient place for quick reference.

**1 OUTLINE**



- This product is used to fix the end of the conductive tube (**ER-AT50**). It also prevents the end of the conductive tube from coming in contact with a grounded object.

**2 PART DESCRIPTION**

Designation	Quantity
Holder A	1
Holder B	1
Holder C	1
Holder D	1
Hexagon-socket-head bolt [M3 (length 10mm)]	2
Hexagon-socket-head set screw [M3 (length 3mm)]	1

**3 ASSEMBLY PROCEDURE**

- ① Fix Holder B firmly with the accessory hexagon-socket-head bolt [M3 (length 10mm)] on the mounting surface.
- ② Assemble Holder A, Holder C and Holder D as shown in the right figure, and adjust in the direction of charge removal with Holder A.
- ③ Fix Holder A, Holder C and Holder D firmly by tightening the hexagon-socket-head bolt.
- ④ Mount the conductive tube (**ER-AT50**) in Holder A. When mounting, keep the length of the conductive tube which protrudes from Holder A within 10mm.
- ⑤ Tighten the accessory hexagon-socket-head set screw [M3 (length 3mm)] to the extent that the conductive tube does not move. Take care that if it is tightened excessively, the conductive tube will deform, reducing the charge removal capacity.

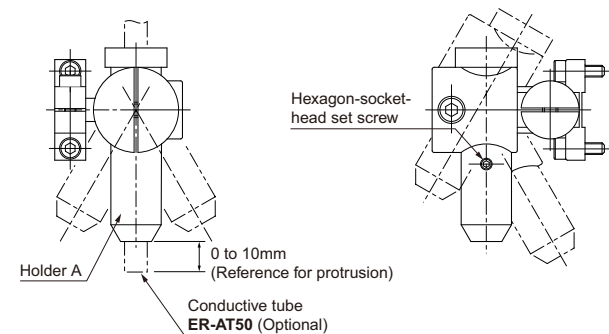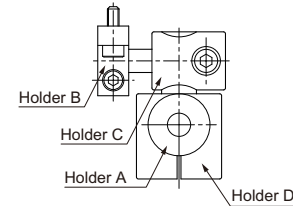

Panasonic Industrial Devices SUNX Co., Ltd.

<http://panasonic.net/id/pidsx/global>

**Overseas Sales Division (Head Office)**

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan  
Phone: +81-568-33-7861 FAX: +81-568-33-8591

About our sale network, please visit our website.

© Panasonic Industrial Devices SUNX Co., Ltd. 2012  
PRINTED IN JAPAN