

Sensor Connector Cables

CCG



SALIENT FEATURES

- ◆ 8 Pin
- ◆ IP - 67
- ◆ PVC Cable

Model Number Legend

CCG-□□□□-□

1 2 3 4 5 6

1. Series

CCG

2. Size

M12: M12 Connector

3. Contacts

8: 8 Contacts

4. Type

M: Male Plug

F: Female Socket

5. Connector

S: Straight

6. Length

2M: 2m Cable

5M: 5m Cable

Example:

CCG-M128FS-2M

CCG Series - M12, 8 Contacts, Female, Straight connector - 2m long Cable

Ordering Information


Connector Size	No. of Contacts	Type	Connection	Length	Model
M12	8	Female Socket	Straight	2 Meter	CCG-M128FS-2M
				5 Meter	CCG-M128FS-5M
		Male Plug		2 Meter	CCG-M128MS-2M
				5 Meter	CCG-M128MS-5M

- Sensing
- Control
- Weighing
- Automation
- Power Supplies
- Switching
- Tower Lamps
- Cables & Electrodes
- Accessories

Ratings and Specifications

Size	M12 Connector			
Models	CCG-128FS-2M	CCG-128FS-5M	CCG-128MS-2M	CCG-128MS-5M
Type	Female Socket		Male Plug	
Connector	Straight			
No. of Contacts	8			
Rated Current	3 A			
Rated Voltage	10~30 VDC; 240 VAC/ DC			
Contact Material	1µm Zinc plated Copper			
Pin Block	PU			
Cover	PU			
Thread Bracket/ Shell	Brass with nickel plating		Brass with nickel plating	
Cable	8 Core - 23 AWG, PVC Cable			
Cable Tensile Strength	25 N			
Ambient Temperature	-25° ~ 90° C			
Protection	IP 68			


Dimension Drawing

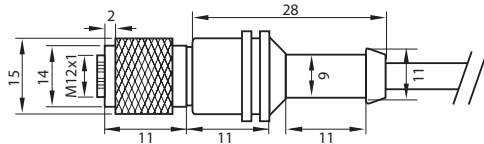

All dimensions are in mm


Connection

• Female



- 1: White
- 2: Brown
- 3: Green
- 4: Yellow
- 5: Gray
- 6: Pink
- 7: Blue
- 8: Red

• Male



Exclusively Represented by:

Intech Systems Chennai Pvt Ltd
 S-2, Guindy Industrial Estate
 Chennai - 600 032. Ph: 4353 8888
 Email: info@intechchennai.com

www.inno.sg

© INNO, Rights Reserved
 In the interest of continuous product improvement
 specifications are subject to change without notice

Cat. No. CCG-512

www.inno.sg/ccg