

Static Remover Ionizer · Spot type

ER-VS02

CMJE-ERVS02 No.0076-48V

Thank you very much for using Panasonic products. Please read this Instruction Manual carefully and thoroughly for the correct and optimum use of this product. Kindly keep this manual in a convenient place for quick reference.

WARNING

- Never use this product with a device for personnel protection. In case of using devices for personnel protection, use products which meet laws or standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.
- Do not use this product near or around surroundings containing any dangerous materials, such as combustible material and flammable material. Dust gathers on and around the discharge needle, and inside the nozzle depending on the environment.
- Be sure to clean up the discharge needle, periodically once a week or so, or this product will be unable to exert the charge removal performance, which may also cause ignition or product malfunction. However, when using this product in the environment exposed to too much dust, be sure to clean up the discharge needle frequently.
- Be sure to ground the main body of this product via ground terminal to ensure electric shock prevention and reliable charge removal.
- Since the discharge needle is live with high voltage, never touch the discharge needle, or an electric shock may result.
- If this product is used in an airtight room, ozone emitted from this product may be detrimental. Therefore, in order for this product to be used in an airtight room, be sure to sleep the room ventilated.
- Since the ion air contains ozone, do not aim this product at anyone.
- Make sure that the power supply is off while checking the high-voltage part. Otherwise, you may get an electric shock.

1 OUTLINE

- This product is a compact, corona discharge type electrostatic charge removal device.
- This product neutralizes electrostatic charge from charged objects quickly and effectively.
- This product removes dust stuck to charged objects due to static electricity, and keeps such objects free from electrostatic dust.

2 CAUTIONS

- Make sure to use the DC power supply insulated by an isolation transformer etc. for this product. If an auto-transformer etc. (single winding transformer) is used, this product or the power supply may get damaged due to short-circuit.
- Be sure to ground the product using the ground terminal. Improper grounding can result in a significant reduction of static electricity removing performance or generation of an error. (Class-D grounding or grounding via power supply common terminal)
- When the air is not supplied to the product, stop discharging either input discharge halt (DSC OFF) or turn the power off. If discharge is continued without supplying the air, the amount of ozone generation increases and it may cause the accident and breakdown.
- If turn ON/OFF the air supply by a solenoid valve etc., the discharge must be turned ON/OFF simultaneously.
- Do not turn on the power supply with the discharge needle unit removed.
- Do not use during the initial transient time (0.5 sec) after the power supply is switched on.
- If the power supply is switched on immediately after being switched off, fault output may be generated. After the power supply is switched off, keep an interval of 1 sec, or more, before switching on again, or more, before switching it on again.
- When using as a CSA and UL compliant product, use a CLASS 2 CSA/UL certified power supply, or a CSA/UL certified power supply that has been evaluated as a Limited Power Source as specified in CAN/CSA-C22.2NO.60950-1/UL60950-1.

- This product has been developed / produced for industrial use only.
- Do not use this product beyond its rated specifications. Doing so can cause product breakdown, non-function, or damage. Further, it will also cause a marked reduction in product life.
- Never disassemble, repair, modify, or misuse this product, as it can cause accident or malfunction.
- Do not throw this product in fire. There is a danger of it exploding, or generating poisonous gas.
- Since this product emits ozone into the atmosphere, circulate the air if it is foul-smelling. If ozone stays for long period, metals etc. may oxidize/decay. Further, do not try to confirm the foul-smelling ozone by drawing your face near the nozzle outlet. There is a danger of hurting your nose, throat, etc.
- If this product is used immediately after storage in a high-humidity environment, its ion balance may remain lost. Therefore, before use, leave this product in the atmosphere with a temperature of +25°C or so and a relative humidity of 30% RH for over 8 hours.
- Do not use this product in steamy or dusty places and in places where water splashes or spatter flies when welding.
- Avoid use at an elevation higher than 2000m, and outdoor use.
- Make sure that the power supply is off while wiring and inspection. Otherwise, there is a danger of accident, electric shock or malfunction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case a surge is generated in the used power supply, connect a surge absorber to the supply and absorb the surge.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.
- Confirm the wiring and piping state before supplying power or air. Wrong wiring and piping may cause malfunction.

- Use air (dried clean air) for the fluid. Fluid other than air (dried clean air) or that containing corrosive gas may cause accident or malfunction.
- Do not use air containing foreign particles, such as, carbon dust or dust, water or oil. Since those may cause ignition, electric shock, or malfunction, take appropriate measures, such as, installing an air-filter or an air drier, etc.
- When maintenance, checkup or cleaning are carried out, make sure to cut the air supply completely and confirm that the inside the product and the tubes become atmospheric pressure in advance. The remained air pressure may cause accident or malfunction.
- Extension up to total 10m is possible with 0.15mm² or more, cable. However, in order to reduce noise, make the wiring as short as possible.
- Do not use this product for a purpose other than charge removal.
- When this product is no longer usable or required, carry out the appropriate disposal process meant for industrial waste.

3 MAJOR SPECIFICATIONS

Type	Spot type
Item Model No.	ER-VS02
Charge removal time	1 sec. or less (Note 1)
Ion balance	±10V or less (Note 1)
Ozone generation	0.03ppm or less (Note 2)
Applicable fluid	Air (direct clean air) (Note 3)
Supplied air flow	500 l/min (ANR) or less (Note 4)
Air pressure range	0.05MPa to 0.7MPa (Note 4)
Supply voltage	24V DC ±10%
Current consumption	70mA or less
Discharge method	High frequency AC method
Discharge output voltage	2,000V approx.
Check output (CHECK)	NPN open-collector transistor • Maximum sink current : 50mA • Applied voltage : 30V DC or less (between check output and 0V) • Residual voltage : 1V or less (at 50mA sink current)
Output operation	ON when a dirt or wear etc. of the discharge needle is detected for 1.5 sec. or more continuously, OFF when operation is normal (Note 5)
Short-circuit protection	Incorporated
Error output (ERROR)	NPN open-collector transistor • Maximum sink current : 50mA • Applied voltage : 30V DC or less (between error output and 0V) • Residual voltage : 1V or less (at 50mA sink current)
Output operation	OFF when abnormal discharge is detected, ON when operation is normal
Short-circuit protection	Incorporated
Discharge halt input (DSC OFF) (Note 6)	Discharge halt: short-circuit with 0V Discharge allowed (operation start): Open
Reset input (RESET)	In the state that operation is stopped due to an error detection, open 0V of the power supply from short-circuit state to cancel ERROR.
Indicators	Power Green LED (lights up when the power is ON) Discharge Green LED (lights up when discharging) Check Orange LED (lights up when a dirt or wear etc. of the discharge needle is detected for 1.5 sec. or more continuously) Error Red LED (lights up when error is detected)
Pollution level	2
Over voltage category	I
Ambient temp./humidity	0 to +55°C / 35 to 65%RH (No dew condensation)
Operating altitude	2,000m or less (Note 7)
Cable	Cable with a connector, 0.5m long
Material	Enclosure: PPS, Cover: Stainless steel, Discharge Needle: Tungsten, Needle holder: PC
Weight	120g approx.
Accessory	Connector for wiring: 1 set [Manufactured by Molex: Housing (5557-08R), Terminal (5556T)]

Notes: 1) A typical sample (measured on a sample left in the atmosphere at a relative humidity of 65% RH for 24 hours) applied with a power voltage of 24V, a distance of 100mm from the front surface of the airflow inlet and a pressure of 0.25MPa while the shower nozzle is in use.
2) A typical sample applied with a power voltage of 24V, a distance of 300mm from the front surface of the air flow inlet and a pressure of 0.25MPa while the shower nozzle is in use.
3) The air is dried (dew point: equivalent of -20°C) and filtered (mesh-size: equivalent of 0.01 μm) air.
4) The applicable pressure range depends on the nozzle to be used.
5) When confirming the check output, carry out discharge for 2 sec. or more.
6) "DSC" stands for "DISCHARGE".
7) Do not use or store the device in an environment where the air pressure is higher than the atmospheric pressure at an altitude of 0 meters.

Options


- Nozzle and Holder**
For details of the nozzle and holder, refer to the instruction manual enclosed with the nozzle.
- AC adapter**
- Discharge unit**

Model No.	Description
ER-VAPS1	IN: 100 to 120V AC, 50/60Hz, 40VA OUT: 24V DC, 750mA

Model No.	Description
ER-VANT2	Unit with the tungsten needle (1 set)


4 MOUNTING

- Be sure to ground the product using the ground terminal. Improper grounding (with class D grounding (100 Ω or less) or grounding via power supply common terminal) can result in a significant reduction of static elimination performance or generation of an error. Manually tighten the grounding terminal screws.
- If AC adopter is used, be sure to connect the ground terminal to the power supply common earth.
- When this product is mounted on a housing, use M4 screws. (please arrange separately.) The tightening torque should be 2N·m or less.
- If more than 2 units are mounted closely, keep 5mm, or more, distance between them. Other-wise, the capability may be affected.

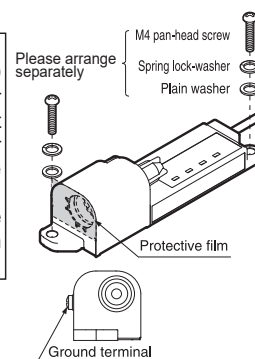

WARNING


- This product cannot be used by its own. Be sure to fit the optional nozzle for use of this product.
- Never modify the optional nozzle. If the modified nozzle is used, the pressure inside of the nozzle increases, and the check output works as the monitoring function of the discharge part is activated.
- For the details of the optional nozzle, refer to the instruction manual enclosed with the nozzle.

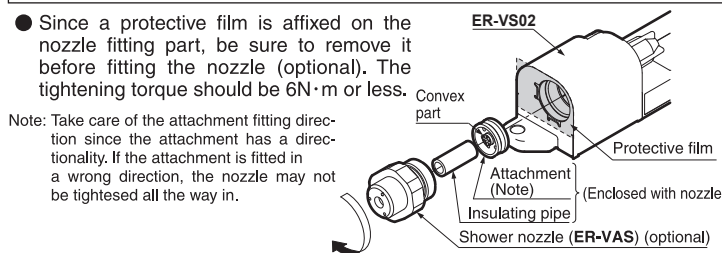

5 PIPING


- The outer diameter of the air-tube to fit to the air inlet portion of this product should be φ6mm.
- Make sure that clean air (air containing no-water, no-oil and no dust) should be supplied.
- Since the pressure will drop when the air piping from the main pressure supply is extended or pneumatic-components (e.g., needle valve, speed-controler, mini filter) are added, keep an eye on the pressure supply to the ionizer making sure it isn't in short supply. For the pneumatic-components, select those that can accommodate the air supply flow rate.

6 I/O CIRCUIT DIAGRAMS

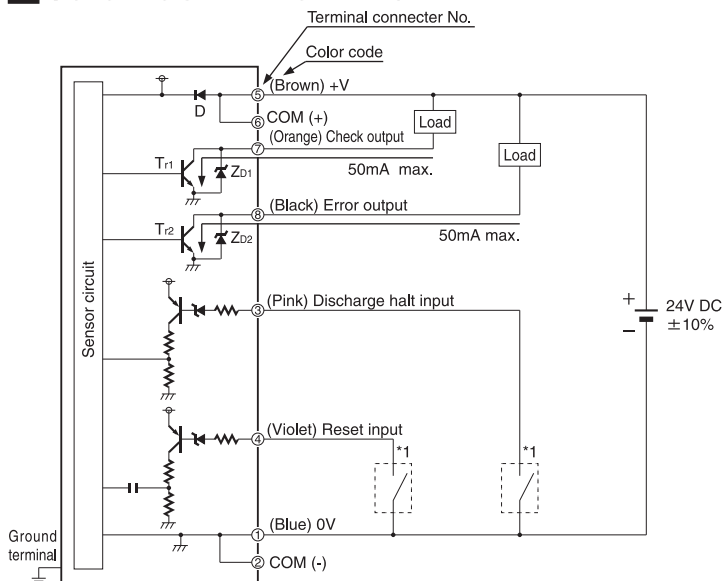

Symbols... D: Reverse supply polarity protection diode
Zd1, Zd2: Surge absorption zener diode
Tr1, Tr2: NPN output transistor


※1

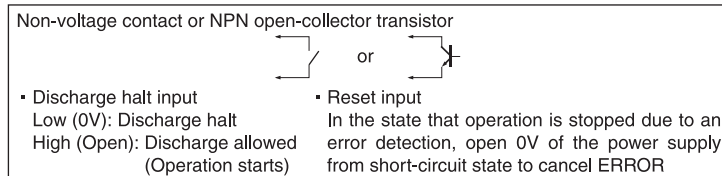

Connector pin arrangement

Terminal No.	Terminal	Color code
①	0V	Blue
②	COM (-)	—
③	Discharge halt input	Pink
④	Reset input	Violet
⑤	24V	Brown
⑥	COM (+)	—
⑦	Check output	Orange
⑧	Error output	Black

7 INPUT SIGNAL CONDITIONS

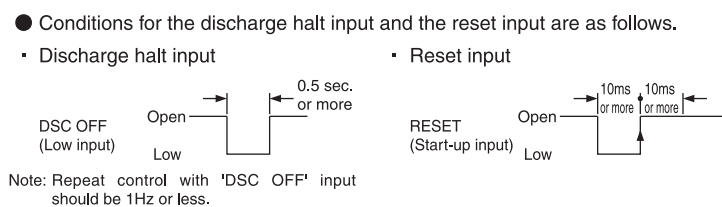

8 OPERATION MATRIX

	Indicators (☀: Lights up, ○: OFF)				Output		Discharge through needle
	Power	Discharge	Check	Error	Check	Error	
Normal	☀	☀	○	○	OFF	ON	ON
Check	☀	☀	☀	○	ON	ON	ON
Error	☀	○	○	☀	OFF	OFF	OFF
Discharge halt input	☀	○	○	○	OFF	ON	OFF
Reset input	☀	(Hold)	(Hold)	○	(Hold)	ON	(Permit)


Notes: 1) 'DSC OFF' input in the 'ERROR' state is invalid (since the 'ERROR' state is prioritized).
2) 'RESET' input is enabled even when in the 'DSC OFF' input state, and 'DSC OFF' input remains unaffected by 'RESET' input.
3) 'RESET' input in the 'ERROR' state resumes the 'ERROR' state unless the cause of the error has been eliminated.

9 MAINTENANCE

- Since the removal discharge effect will deteriorate if dirt is stuck to the tip of the discharge needle, clean the discharge needle periodically.
- The maintenance required depends on the environment of use. As a reference, the maintenance should be done once in one month.
- The discharge needle is a part having a product life time. It is recommended that the needle should be replaced, as a reference, after 20,000 hours in use. When replacing it, replace the whole unit.

Procedure of cleaning and replacing the discharge needle

- Confirm that the power supply is off.
- Unscrew the discharge needle counter-clockwise.
- Remove the dirt on and around the discharge needle with a cotton bud soaked in alcohol.
- After cleaning, screw the needle clockwise to fit. The tightening torque should be 0.1N·m or less. (A3mm hexagonal wrench etc. can be used.)




10 TROUBLE SHOOTING

Make sure that the power is turned off before checking the high-voltage part. Otherwise, an electric shock may result.

Symptom	Remedy
Check indicator (orange) lights up	<ul style="list-style-type: none"> Make sure that the power voltage is within the tolerance as per specifications. Check the tip of the discharge needle for chips and contamination, and make sure that the discharge needle unit is mounted normally on the main body. If the CHECK indicator (orange) lights up even after cleaning the discharge needle, also check the nozzle part for contamination. Make sure that the nozzle assembly (including the attachment and the insulating pipe) is mounted properly. Make sure that the air pressure is within the applicable range as per specifications.
Error indicator (red) lights up	<ul style="list-style-type: none"> Make sure that the grounding terminal is properly connected. Grounding conditions may vary depending on the usage environment. If an error occurs when the grounding terminal is connected, connect the terminal to the power supply common terminal. Abnormal discharge is possible. Turn off the power supply, check the tip of the discharge needle for chip and contamination, and make sure that the discharge needle unit is mounted normally on the main body. Also, check the inside of the nozzle for foreign objects, and make sure that the nozzle is mounted and installed properly. Make sure that the power voltage is within the tolerance as per specifications.
Doesn't go back to normal state by reset	<ul style="list-style-type: none"> Make sure that the cause of the error has been eliminated.

11 DIMENSIONS (Unit: mm)

Mounting drawing with shower nozzle (optional)

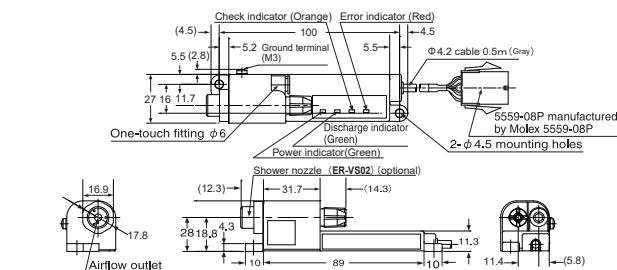

12 INTENDED PRODUCTS FOR CE MARKING

The models listed under '3 MAJOR SPECIFICATIONS' come with CE Marking. As for all other models, please contact our office.

13 CSA/UL COMPLIANT PRODUCT

This product complies with CSA and UL standards, and has been certified by TÜV SÜD.